



204-A

204-A

## R-F POWER AMPLIFIER, OSCILLATOR, CLASS B MODULATOR

Filament	Thoriated Tungsten	
Voltage	11	a-c or d-c volts
Current	3.85	amp.
Amplification Factor	23	
Direct Interelectrode Capacitances (approx.):		
Grid to Plate	15	$\mu\text{uf}$
Grid to Filament	12.5	$\mu\text{uf}$
Plate to Filament	2.3	$\mu\text{uf}$
Overall Length	14-1/4" $\pm$ 1/8"	
Maximum Diameter	4-1/16"	
Bulb	T-32	
Cap	No. 1904	
Base	No. 3502	

### MAXIMUM RATINGS and TYPICAL OPERATING CONDITIONS

#### A-F POWER AMPLIFIER & MODULATOR - Class B

D-C Plate Voltage	3000 max.	volts
Max.-Signal D-C Plate Current *	275 max.	ma.
Max.-Signal Plate Input *	600 max.	watts
Plate Dissipation *	250 max.	watts

Typical Operation - 2 tubes:

*Unless otherwise specified, values are for 2 tubes.*

Filament Voltage	11	11	11	a-c volts
D-C Plate Voltage	2000	2500	3000	volts
D-C Grid Voltage	-60	-80	-100	volts
Peak A-F Grid-to-Grid Volt.	500	500	500	volts
Zero-Sig. D-C Plate Cur.	80	80	80	ma.
Max.-Sig. D-C Plate Cur.	500	420	372	ma.
Load Resistance (per tube)	2200	3400	5000	ohms
Effective Load Resistance (plate to plate)	8800	13600	20000	ohms
Max.-Signal Driving Power	20	18	18	approx.watts
Max.-Signal Power Output	600	650	700	approx.watts

\* Averaged over any audio-frequency cycle.

#### R-F POWER AMPLIFIER - Class B Telephony

*Carrier conditions per tube for use with a max. modulation fact. of 1.0*

D-C Plate Voltage	2500 max.		volts
D-C Plate Current	225 max.		ma.
R-F Grid Current	8 max.		amp.
Plate Input	400 max.		watts
Plate Dissipation	250 max.		watts
Typical Operation:			
Filament Voltage	11	11	a-c volts
D-C Plate Voltage	1500	2000	volts
D-C Grid Voltage	-50	-70	volts
Peak R-F Grid Voltage	170	165	volts
D-C Plate Current	200	160	ma.
Driving Power ** $\circ$	18	15	approx.watts
Power Output	80	100	approx.watts

\*\* ,  $\circ$ : See next page.

(continued on next page)

204-A



204-A

## R-F POWER AMPLIFIER, OSCILLATOR, CLASS B MODULATOR

(continued from preceding page)

### PLATE-MODULATED R-F POWER AMPLIFIER - Class C Telephony

Carrier conditions per tube for use with a max. modulation fact. of 1.0

D-C Plate Voltage	2000 max.	volts
D-C Grid Voltage	-500 max.	volts
D-C Plate Current	275 max.	ma.
D-C Grid Current	80 max.	ma.
R-F Grid Current	8 max.	amp.
Plate Input	550 max.	watts
Plate Dissipation	167 max.	watts

#### Typical Operation:

Filament Voltage	11	11	a-c	volts
D-C Plate Voltage	1500	2000		volts
D-C Grid Voltage	-200	-250		volts
Peak R-F Grid Voltage	450	500		volts
D-C Plate Current	250	250		ma.
D-C Grid Current**	35	35	approx.	ma.
Driving Power**	20	20	approx.	watts
Power Output	225	350	approx.	watts

### R-F POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Key-down conditions per tube without modulation\*\*

D-C Plate Voltage	2500 max.	volts
D-C Grid Voltage	-500 max.	volts
D-C Plate Current	275 max.	ma.
D-C Grid Current	80 max.	ma.
R-F Grid Current	10 max.	amp.
Plate Input	690 max.	watts
Plate Dissipation	250 max.	watts

#### Typical Operation:

Filament Voltage	11	11	11	a-c	volts
D-C Plate Voltage	1500	2000	2500		volts
D-C Grid Voltage	-150	-175	-200		volts
Peak R-F Grid Voltage	400	425	440		volts
D-C Plate Current	250	250	250		ma.
D-C Grid Current**	30	30	30	approx.	ma.
Driving Power**	15	15	15	approx.	watts
Power Output	240	350	450	approx.	watts

\*\* Subject to wide variations as explained on sheet TRANS. TUBE RATINGS.

\*\* Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.


o At crest of audio-frequency cycle with modulation factor of 1.0.

For use of the 204-A at the higher frequencies, refer to sheet TRANS. TUBE RATINGS vs FREQUENCY.




204-A


# 204-A R-F POWER AMPLIFIER, OSCILLATOR CLASS B MODULATOR

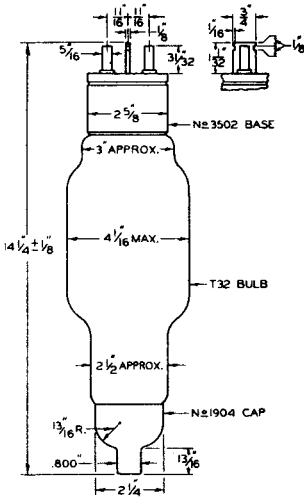

TUBE SYMBOL & CONNECTIONS TO END-MOUNTINGS



## TYPICAL CHARACTERISTICS

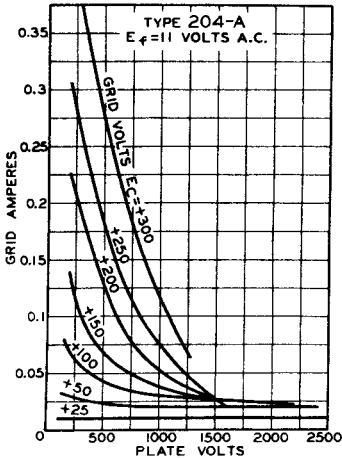

92C-4456R1



## AVERAGE PLATE CHARACTERISTICS

