

12E1

BEAM TETRODE

Indirectly heated—for parallel operation

GENERAL

The 12E1 is intended for use as a series or shunt control valve in stabilised power packs.

RATING

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	1.6
Maximum Anode Voltage (volts)	$V_a(\text{max})$	800
Maximum Screen Voltage (volts)	$V_{g_2}(\text{max})$	300
Maximum Control Grid Voltage (volts)	$V_{g_1}(\text{max})$	-100
Maximum Voltage between E_1 and E_2 (volts)	$V_{g_1-g_2}(\text{max})$	400
Mutual Conductance (mA/V)	g_m	14*
Inner μ	μ_{g_1, g_2}	5.3*
Maximum Anode Dissipation (watts)	$P_a(\text{max})$	35
Maximum Screen Dissipation (watts)	$P_{g_2}(\text{max})$	5.0
Maximum Cathode Current (mA)	$I_k(\text{max})$	300
Maximum Potential Heater/Cathode (volts D.C.)	$V_{h-k}(\text{max})$	300†

* Taken at $V_a = V_{g_2} = 150V$ $I_b = 200mA$.

† Provided the cathode is positive.

All maximum ratings are Absolute values not Design Centres.

INTER-ELECTRODE CAPACITANCES (pF)

Grid/Earth	C_{in}	23.0
Anode/Earth	C_{out}	8.0
Anode/Grid	C_{a, g_1}	0.85

"Earth" denotes the remaining earthy potential electrodes and heater joined to cathode.

**12E1****BEAM TETRODE**


Indirectly heated—for parallel operation

DIMENSIONS

Maximum Overall Length (mm)	146
Maximum Diameter (mm)	54
Maximum Seated Height (mm)	133
Approximate Net Weight (ozs)	2½
Approximate Packed Weight (ozs)	7


MOUNTING POSITION—Vertical

If run horizontally then the axis AB must be on a horizontal plane.

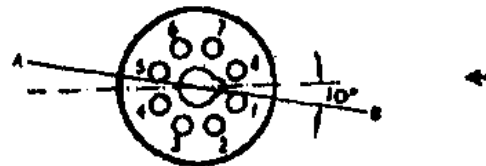BULB—Clear**TOP CAP**—American miniature (CT.1)**BASE**—International Octal (108)**CONNECTIONS**

Pin 1	No connection	NC
Pin 2	Heater	h
Pin 3	No connection	NC
Pin 4	Screen Grid	S_1
Pin 5	Control Grid	C_1
Pin 6	No connection	NC
Pin 7	Heater	h
Pin 8	Cathode	k
Top Cap	Anode	a

12E1
BEAM TETRODE
 Indirectly heated—for parallel operation

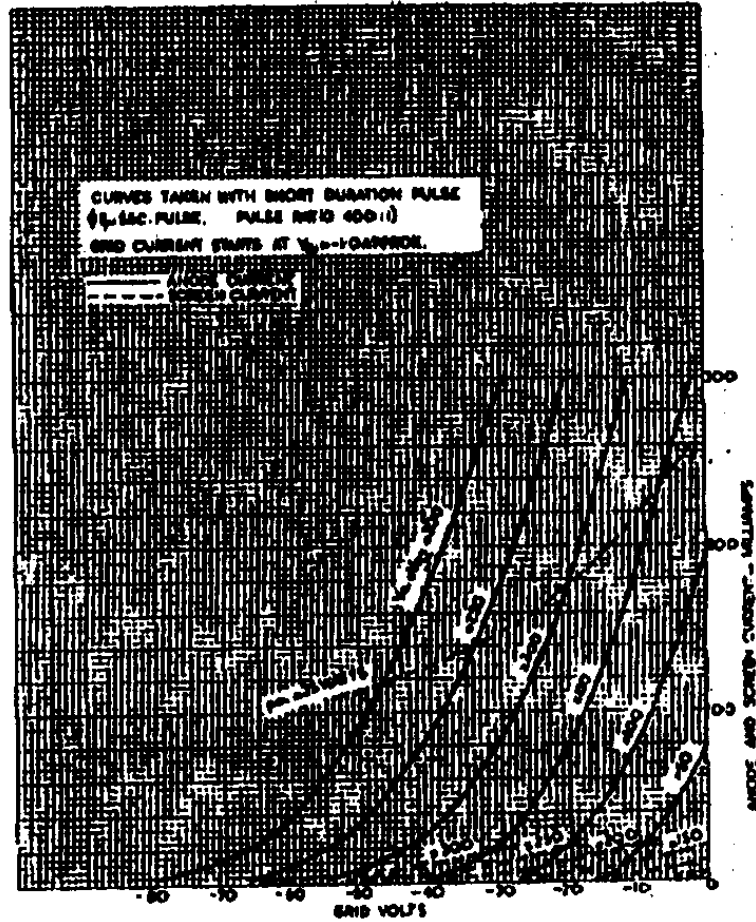



12E1
BEAM TETRODE
Indirectly heated—for parallel operation

