




5T4

5T4

**FULL-WAVE HIGH-VACUUM RECTIFIER**

Filament	Coated	
Voltage	5.0	a-c volts
Current	2.0	amp.
Maximum Overall Length		4-5/16"
Maximum Diameter		1-5/8"
Bulb		Metal Shell, MT-10
Base		Small Wafer Octal 5-Pin
Pin 1 - Shell		Pin 6 - Plate #1
Pin 2 - Filament		Pin 8 - Filament
Pin 4 - Plate #2		
Mounting Position		Vertical <sup>◇</sup>




BOTTOM VIEW (5T)

FULL-WAVE RECTIFIER

Peak Inverse Voltage	1550 max. volts
Peak Plate Current per Plate	675 max. ma.
<i>Typical Operation with Condenser-Input Filter:</i>	
A-C Plate Voltage per Plate (RMS)	450 max. volts
Total Effective Plate-Supply Impedance per Plate <sup>▲</sup>	150 min. ohms
D-C Output Current	225 max. ma.
<i>Typical Operation with Choke-Input filter:</i>	
A-C Plate Voltage per Plate (RMS)	550 max. volts
Input-Choke Inductance	3 min. henries
D-C Output Current	225 max. ma.

- <sup>◇</sup> Horizontal operation permitted if pins 2 and 8 are in vertical plane.  
<sup>▲</sup> When a filter-input condenser larger than 40  $\mu$ f is used, it may be necessary to use more plate-supply impedance than the minimum value shown to limit the peak plate current to the rated value.

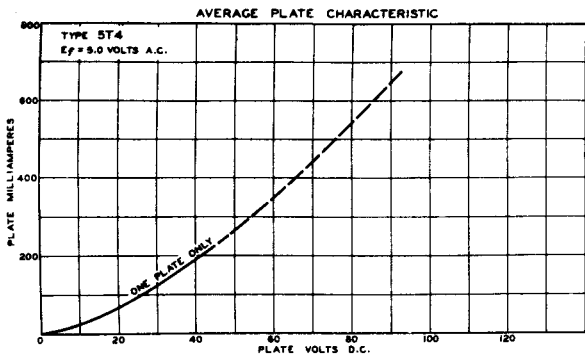

5T4



5T4

## OPERATION CHARACTERISTICS

