

VIDEO OUTPUT PENTODE

EL821

Video output pentode having a high mutual conductance, particularly suitable for use in high definition television equipment.

HEATER

V_h	6.3	V
I_h	750	mA

CAPACITANCES (measured without an external shield)

C_{in}	14	pF
C_{out}	5.0	pF
C_{a-g1}	<250	mpF
C_{h-k}	7.0	pF

CHARACTERISTICS

V_a	250	250	V
V_{g3}	0	0	V
V_{g2}	200	250	V
V_{g1}	-2.5	-4.5	V
I_a	40	40	mA
I_{g2}	6.5	6.0	mA
g_m	13	11	mA/V
r_a	60	50	k Ω
μ_{g1-g2}	26	26	
* T_{bulb}	203	205	$^{\circ}$ C

*At 20 $^{\circ}$ C ambient, in free air at normal atmospheric pressure and without external screening can.



LIMITING VALUES

$V_{a(b)}$ max.	550	V
V_a max.	275	V
p_a max.	12	W
$V_{g2(b)}$ max.	550	V
V_{g2} max.	275	V
p_{g2} max.	2.5	W
I_k max.	60	mA
R_{g1-k} max. (cathode bias)	220	k Ω
R_{g1-k} max. (fixed bias)	100	k Ω
V_{h-k} max.	90	V
T_{bulb} max.	250	$^{\circ}$ C




EL821

VIDEO OUTPUT PENTODE



All dimensions in mm

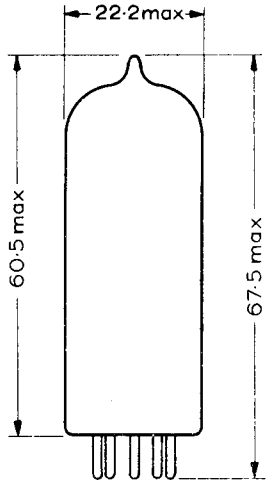

6396